

Prism Bay 22 (ESB)

Prism Bay 22 Specification

Prism Bay 22 versatile high bay luminaire shall consist of a 22" acrylic reflector/refractor, two piece heavy duty die cast aluminum ballast housing, designed for most industrial and commercial applications. Ballast mounted directly to the ballast housing for cooler operation. Available in 250 to 400 watt high pressure sodium lamp or 175-400 watt metal halide lamp. Available with (specify) 120, 208, 240, 277, 480 volt or 4MT (120,208,240,277V) 60Hz ballast. Luminaire shall be completely pre-wired.

Basic Product Description

Luminaire is finished in white powder polyester finish with 3/4" threaded hub on top of pendant adapter. The pendant slide on adaptor assures plumb alignment for swivel pendant and pre-wired power hook mounting. Labor saving combination through wire and outlet box slide on adaptor has keyhole slots for direct to junction box installation. Porcelain socket will contain a lamp grip, nickel plated spring loaded center contact, eliminating lamp loosening.

Ballast Characteristics

The Prism Bay shall contain a long lasting, suitable for 55°C (40°C enclosed) ambient temperature, U.L. recognized High Power Factor, constant wattage auto-transformer type ballast. Will start metal halide lamps at -20°F (-30°C) and -40°F (-40°C) for HPS. Mercury vapor lamps may be used in 175-400 watt metal halide fixtures. For availability of 220/240V 50Hz ballasts - consult factory.


Reflector/Refractor Assembly

The acrylic seamless reflector/refractor provides a IES type V wide beam distribution. For polycarbonate reflector/refractor, consult factory. The refractor can be supplied open or enclosed. A flat acrylic clear lens is also available.



Lamp not included

WEIGHT = 17-30 lbs

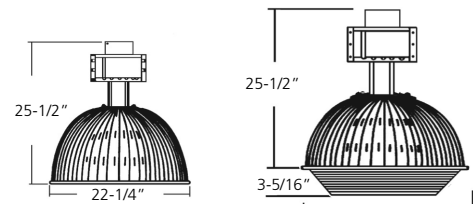

Form AO & FL

Form AC

For 175W & 250W Metal Halide lamps - form AC only

Accessories/Mounting Brackets, see Accessory Page


Reflexor[®] by LEXALITE[®]

Ordering Example							
Unit ESB	Wattage 6	Photometrics 5	Mounting 7	Lamp Style H	Voltage 208	Ballast Style H	Refractor AO22
Prism Bay	3 - 175** 4 - 250** 6 - 400 200 - 200PS 320 - 320PS** 350 - 350PS** 400 - 400PS	5 - Wide Beam	7 - Pendant Mount 8 - Combination thru wire outlet box	H - Metal Halide LS - High Pressure Sodium	120 208 240 277 480 4MT- (120, 208, 240, 277V) RBH - Remote Ballast*	H - High Power Factor	AO - Open (250W max) AC - Drop Lens (250W max) FL - Flat Lens (250W max) CL - Conical Lens
				Accessories			
				SIF			
				SIF - Single Inline Fuse (120,277)			
				DIF - Double Inline Fuse (208,240,480)			
				BSC - Ballast Safety Cable (6 foot)			
				RSC - Reflector Safety Cable (2 foot)			
				DP - Damp Location			
				3CPLG - 3' cord w/locking plug			
				FWG 22 - Full Wire Guard 22"			
				WG - Wire Guard (AO only)			
				MH 3/4 - 3/4" Male Hook			
				ML 3/4 - 3/4" Male Loop			
				MPH 3/4 - 3/4" Power Hook			
				EM - Emergency Quartz Relay and Socket			
				EM60 - Emergency Quartz Delay Relay and Socket			
				QS - Quartz Socket only-auxiliary power required			
				FL - Flat Acrylic Clear lens			
				QB - Encapsulated ballast for quiet operation			
				DL - Energy saver "Dualumen" system			
*Consult Factory							
**Requires protected lamp and special socket or enclosed reflector with lens.							
CSA Certification - consult factory.							



Prism Bay 22 (ESB)

Photometrics

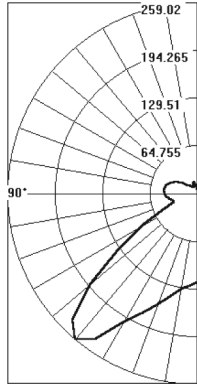

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	144.0	14.4	15.0
0-40	301.6	30.2	31.4
0-60	623.4	61.9	64.5
0-90	766.3	76.6	79.8
90-120	140.0	14.0	14.6
90-130	163.7	16.4	17.1
90-150	182.3	18.2	19.0
90-180	193.6	19.4	20.2
0-180	960.0	96.0	100.0

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

	80				70				50				30				10				0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
0	110	110	110	110	105	105	105	105	96	96	96	88	88	88	80	80	80	77			
1	100	95	91	87	95	91	87	84	83	80	77	76	74	72	70	68	66	63			
2	91	83	77	72	87	80	74	70	74	69	65	68	64	61	62	59	57	54			
3	83	74	66	60	79	71	64	58	65	50	55	60	55	52	55	52	48	46			
4	76	65	57	51	73	63	56	50	58	52	47	54	49	45	50	45	42	39			
5	70	58	50	44	67	56	48	43	52	45	40	48	42	38	44	40	36	34			
6	64	51	43	37	61	49	42	36	46	39	34	43	37	32	39	34	31	28			
7	58	45	37	31	55	44	36	30	40	34	29	37	32	27	34	30	26	24			
8	53	40	32	26	51	39	31	26	36	29	24	33	27	23	31	26	22	20			
9	49	36	28	22	46	34	27	22	32	25	21	29	24	20	27	22	18	16			
10	45	32	24	19	43	31	23	18	28	22	17	26	20	16	24	19	15	14			

Catalog Number: ESB-657LS-XXXH-AO-22
Lamp: Clear High Pressure Sodium

Reflector: Formed open bottom 22" dia. acrylic reflector/refractor.

Lumens: Per 1,000 lamp lumens

Efficiency: 96%

CIE Type: Semi-Direct


Luminaire Spacing Criteria: 1.9

Candela & Lumen values are based on 1,000 lamp lumens. For other lamp lumen ratings, multiply candela and lumen values by the number: Lumens divided by 1,000.

Per 1,000 Lamp Lumens

DEG CANDELA LUMENS

0	125.6	
5	132.0	12.8
15	152.4	43.5
25	188.0	87.6
35	253.5	157.7
45	254.1	192.2
55	139.1	125.6
65	56.7	58.0
75	37.3	39.7
85	45.2	49.1
90	47.7	
95	49.2	53.3
105	46.2	49.0
115	38.0	37.6
125	26.6	23.8
135	15.0	12.0
145	10.6	6.7
155	16.0	7.2
165	11.0	3.6
175	5.3	0.7
180	4.0	

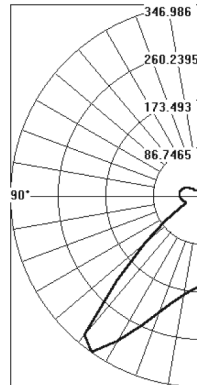

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	196.4	19.6	21.2
0-40	409.8	41.0	44.2
0-60	655.2	65.5	70.6
0-90	763.6	76.4	82.3
90-120	114.7	11.5	12.4
90-130	136.1	13.6	14.7
90-150	154.0	15.4	16.6
90-180	164.0	16.4	17.7
0-180	927.4	92.7	100.0

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

	80				70				50				30				10				0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
0	107	107	107	107	102	102	102	102	94	94	94	86	86	86	80	80	80	76			
1	98	93	90	86	93	90	86	83	83	80	78	77	74	73	71	69	68	65			
2	90	83	78	73	86	80	75	71	74	70	67	69	66	63	64	62	59	57			
3	83	75	68	63	80	72	66	61	67	62	58	62	58	55	58	55	52	50			
4	77	67	60	55	74	65	58	53	61	55	51	57	52	49	53	49	46	44			
5	71	61	53	48	68	59	52	47	55	49	45	51	57	52	49	53	49	39			
6	66	54	47	41	63	53	46	41	49	43	39	46	41	37	44	39	36	34			
7	60	49	41	36	58	47	40	35	44	38	34	42	36	32	39	35	31	29			
8	55	44	36	31	53	42	35	30	40	34	29	37	32	28	35	30	27	25			
9	51	39	32	27	49	38	31	26	35	28	25	33	28	24	31	27	23	21			
10	47	35	28	23	45	34	27	22	32	26	22	30	24	21	28	23	20	18			

Catalog Number: ESB-657H-XXXH-AO-22
Lamp: Phosphor Coated Metal Halide

Reflector: Formed open bottom 22" dia. acrylic reflector/refractor.

Lumens: Per 1,000 lamp lumens

Efficiency: 92.7%

CIE Type: Semi-Direct

Luminaire Spacing Criteria: 1.6

Candela & Lumen values are based on 1,000 lamp lumens. For other lamp lumen ratings, multiply candela and lumen values by the number: Lumens divided by 1,000.

Per 1,000 Lamp Lumens

DEG CANDELA LUMENS

0	164.0	
5	171.0	16.7
15	200.6	57.6
25	261.7	122.2
35	347.1	213.4
45	215.4	172.0
55	80.1	73.5
65	30.6	32.1
75	33.0	35.0
85	37.7	41.2
90	38.5	
95	39.0	42.4
105	37.7	39.8
115	33.0	32.5
125	24.2	21.3
135	14.0	11.0
145	11.0	7.0
155	12.7	5.8
165	12.0	3.4
175	7.1	0.8
180	8.0	

